


07.1-1843 Testing vacuum pump

Operation no. of operation texts and work units or standard texts
and flat rates:
07-1843

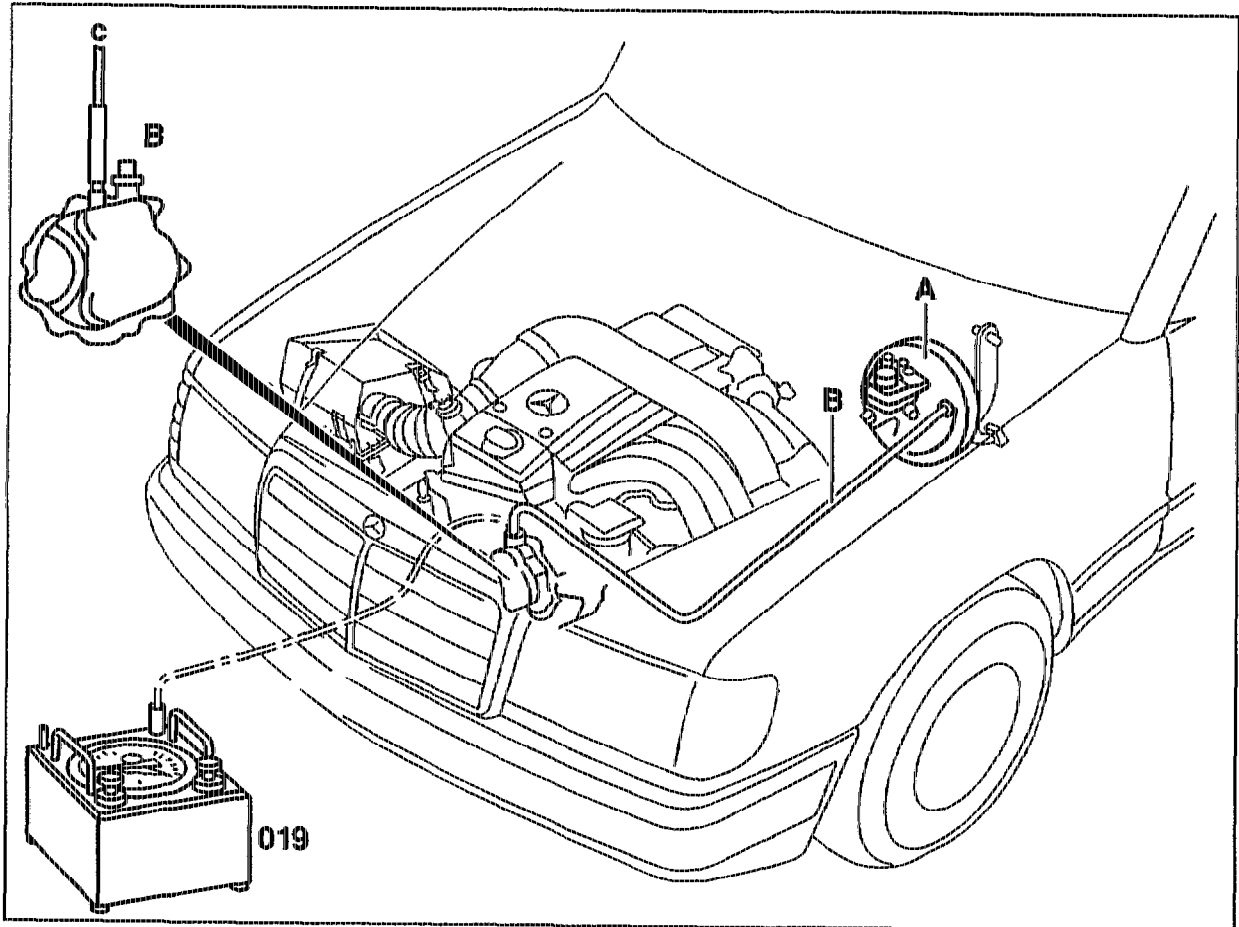

P07-6475-57

Main vacuum line (B) at brake booster (A)	Engine temperature < 20 °C (reference value) disconnect, vent and re-connect.
Vacuum line at ancillaries connection (c)	detach. Use 0.8 mm gauge to check clear passage of restriction drilling.
Vacuum tester (019)	connect to ancillaries connection (c) and test vacuum with engine idling.

Specification: 700 mbar after 30 s.

If the specified vacuum is not achieved, replace vacuum.