


77-150 Removal and installation of tube

Removal

- 1 Remove control cable (77-140).
- 2 Remove motor and gear unit (77-180).
- 3 Remove sun roof top panel (77-100).
- 4 Detach headlining starting from the rear up to sun roof cutout (Group 68).
- 5 Pull damping from rear pillar left.
- 6 Unscrew holding plate on sun roof frame and force off cover above tube.

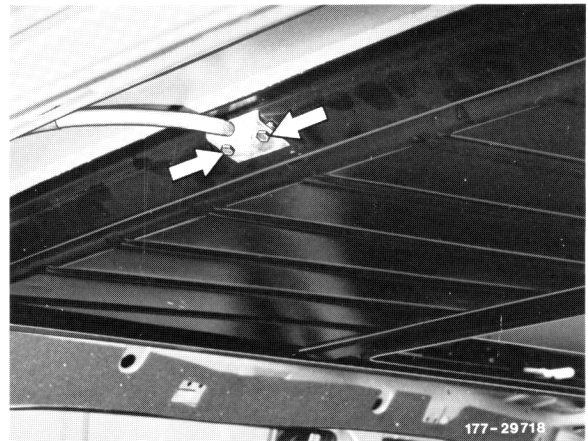


7 Unscrew fastening clamp and belt guide fitting on rear pillar left.

8 Loosen rear part of sun roof frame.

9 Push sun roof frame slightly downward and run out tube at sun roof frame rear, sliding tube into trunk for this purpose.

10 Remove tube in forward direction.

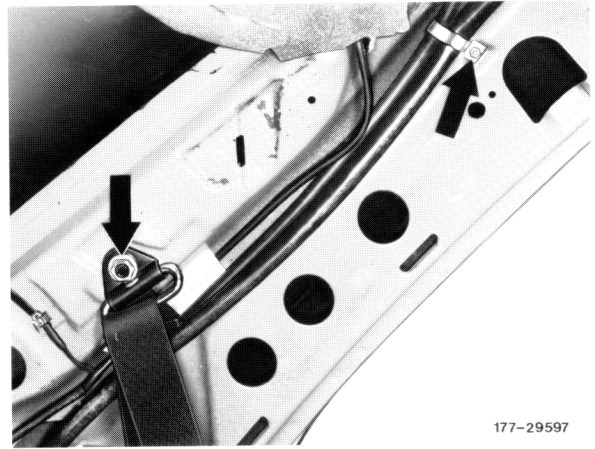

177-29597

Installation

11 Introduce new tube from direction of vehicle interior first into trunk and then into sun roof frame.

Caution!

Do not distort tube during installation, since otherwise the control cable will bind.

12 Fasten tube to sun roof frame and to rear pillar.

13 Install holder with motor and gear unit.

14 For further installation proceed in reverse order.