


82-7874 Removing and Installing speakers In rear doors (Station wagon)

Operation no. of operation texts and work units or standard texts and flat rates:

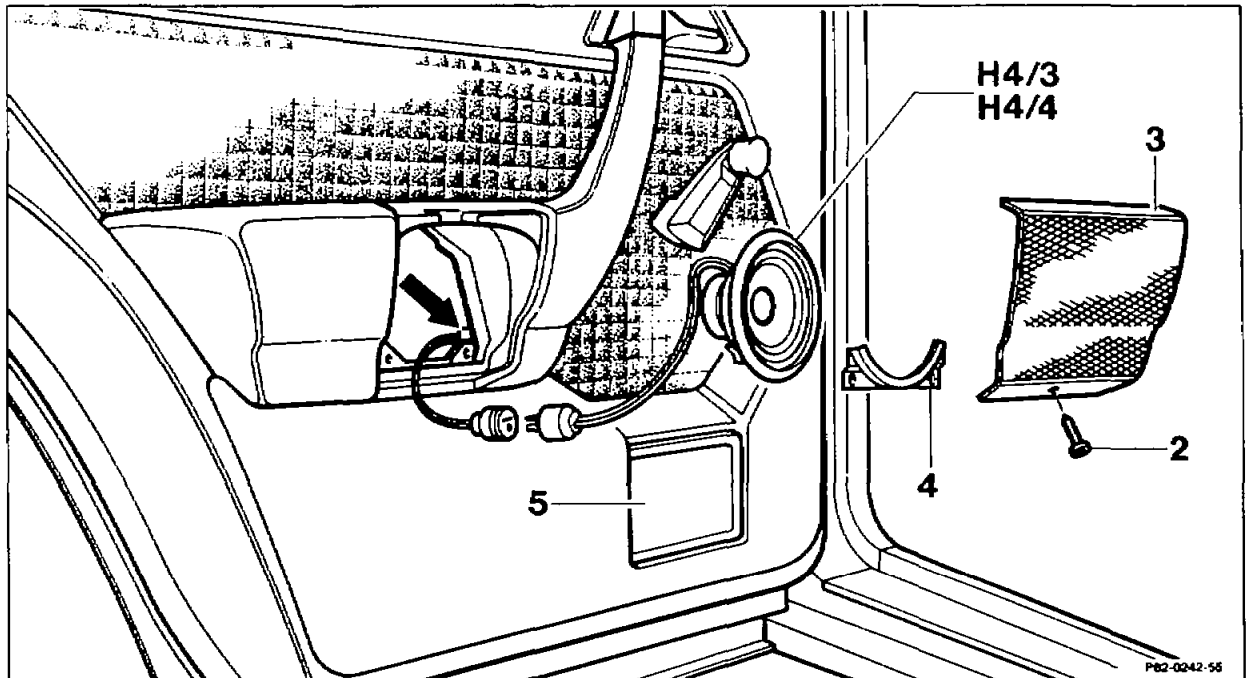

Screw (2)	unscrew, screw in.
Cover (3)	take off, fit on.
Fitting element (4)	remove, insert.
Speakers (H4/3, H4/4)	remove, insert.
Door trim	pull off slightly (arrow). Pull speaker cable with plug connection forward, push in.
Plug connection	separate, plug together. If it is not possible to get access to the plug connection in the opening for the speaker, remove ashtray (5), install. Insert a wire from speaker opening to ashtray opening. Attach speaker cable with plug connection to the wire, pull to speaker opening.